



V4 Grey Acrylic Foam Tape


High Mass grey acrylic tape with red film liner

Product description

- Foamed Acrylic Tape
- Colour: Grey
- Soft, tacky and conformable
- Ideal for engineering, sign & display manufacturing

Construction

- Red PE Liner
- Acrylic adhesive
- Available in log rolls or cut to specific widths

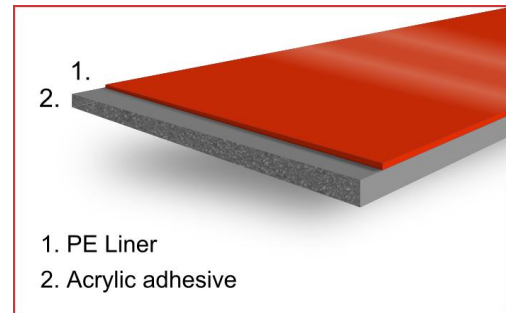

Technical Data

Item	Unit		Spec.		Test method
Thickness	mm	in	1.1	0.043	-
Density	kg/m ³	lb/ft ³	850	53	-
180° Peel Strength	gf/25mm	lbf/in	3900	8.7	ASTM-D-3330
Tensile Strength (T-Block Test)	gf/cm ²	lbf/in ²	6000	85	ASTM-D-897
Dynamic Shear (after 20mins)	gf/cm ²	lbf/in ²	4000	57	ASTM D-1002
Dynamic Shear (after 24h)	gf/cm ²	lbf/in ²	6300	590	ASTM D-1002
Temperature Resistance - Short Term	°C	°F	160	320	-
Temperature Resistance - Long Term	°C	°F	100	212	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Applications: Engineering, Sign and display, Plastics and a wide range of metals

Note: Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. William Hayes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tape's suitability for the intended application.

William Hayes Ltd, Unit 1 Copley Valley Business Park, Sowerby Bridge, HX6 2WA

Sales Tel: 01422 833855

Email: enquiries@williamhayes.co.uk Website: www.williamhayes.co.uk